
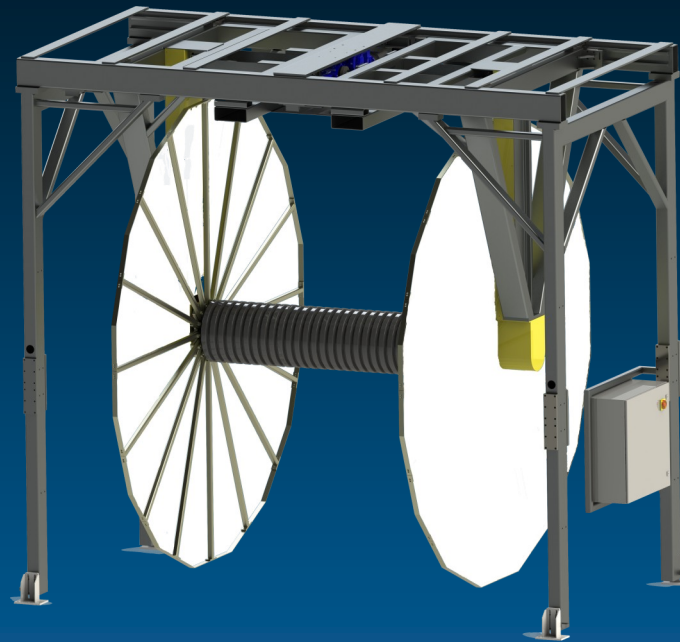


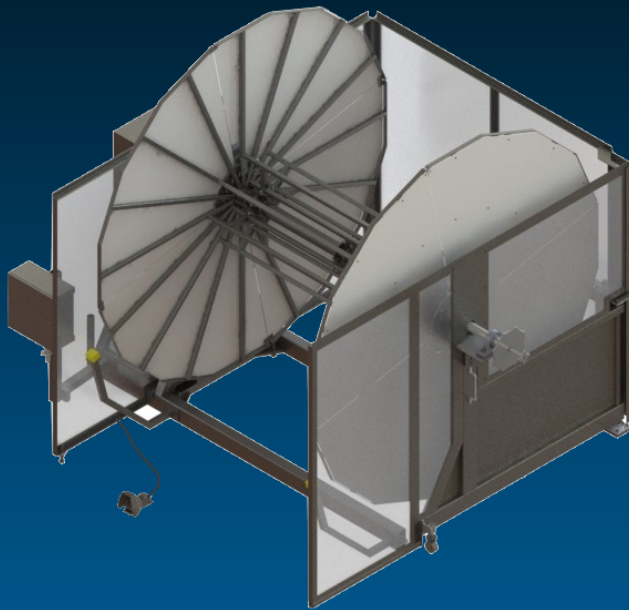

Features

- Ø100-375mm (4 - 15in) pipe
- Up to 45 m/min (150 ft/min)
- Variable speed drive
- Coil start pipe lock device
- Side safety guards
- String retention clips
- PSHSR Compliant
- CSA Certified

TECHNICAL SPECIFICATIONS		Side Exit Maxi Coiler						Front Exit Maxi Coiler					
Technical Data	Pipe Diameter (corrugated & smooth wall)	100mm 4"	150mm 6"	200mm 8"	250mm 10"	300mm 12"	375mm 15"	100mm 4"	150mm 6"	200mm 8"	250mm 10"	300mm 12"	375mm 15"
	Max. Pipe Length (feet)	3600	1400	800	500	300	180	3600	1400	800	500	300	180
	Max Recovery Speed (ft/min)	200											
	Inner Core Diameter	375mm (15")											
	Coil Width Range	2.21 - 2.39m (87" - 94")						2.26 - 2.39m (89" - 94")					
	Outer Coil Diameter	3.2m (126")											
	Coil Exit Options	Left Hand, Right Hand						Front, Rear					
	Dimensions (L x W x H)	4.17m x 3.53m x 3.50m 164" x 139" x 138"						4.47m x 3.35m x 4.24m 176" x 132" X 174"					
Options	Core Extension Tooling	Up to 24"						Up to 24"					
	Removable Core							✓					
	Variable Width Tooling	2.21 - 2.39m (87" - 94")						2.26 - 2.39m (89" - 94")					